21.328

EDISWAN
House Wiring
:SYSTEM:

List No. WW 232.

July, 1921.
List No. WW 232.

The

EDISWAN HOUSE WIRING SYSTEM

THE EDISON SWAN ELECTRIC CO., LTD.
PONDERS END : MIDDLESEX

Telegrams and Cables - - - - "Ediswan, Enfield"
Codes: Western Union, A.B.C. (5th Edition)
Telephone - - - - - - - 520 Enfield (6 lines)

London Showrooms:
123-125 QUEEN VICTORIA ST., E.C.4, & 71 VICTORIA ST., S.W.1

BRANCHES:

ABERDEEN
BELFAST
BIRMINGHAM
BRIGHTON
BRISTOL
CARDIFF
DUBLIN
DUNDEE
EDINBURGH
GLASGOW
HULL
LEEDS
LEICESTER
LIVERPOOL
MANCHESTER
MIDDLESBROUGH
NEWCASTLE-ON-TYNE
NOTTINGHAM
SHEFFIELD
SOUTHAMPTON
SWANSEA

AUSTRALIA—MELBOURNE, SYDNEY, BRISBANE, ETC.

(See page 20 for full addresses).

TERMS *and* CONDITIONS.

The illustrations in this List are intended to serve as a general guide, but are not binding as to detail. All weights, quantities and dimensions are approximate, and we reserve the right to alter anything listed without notice.

PRICES.—Owing to the continued fluctuations in the cost of raw material and labour at the time this List is going to press, the Prices quoted herein are subject to alteration without notice.

Orders received for Goods, whether in stock or not, will be acknowledged and, wherever possible, the current price will be stated.

ACCOUNTS.—Customers desiring to open Ledger Accounts with us can do so upon furnishing two satisfactory References, otherwise orders must be accompanied by a remittance in payment for the goods, plus the cost of packing, where the same has been stated.

PACKING.—Unless otherwise specified all wooden packing cases, etc., must be returned to our Works at your expense and in good condition, within one month of receipt, otherwise they will be charged for.

DELIVERY.—Unless otherwise specified, the price quoted includes delivery within the carriers' local delivery areas only on orders of the value of £5 and upwards, and for delivery within the Railway Company's free delivery area only on orders of £20 and upwards when consigned by rail, subject to the Railway Company's conditions. Orders below £5 in value will be consigned "carriage forward."

PAYMENT.—Accounts must be settled by the last day of the month following the month of delivery; 2½ per cent. discount allowed on accounts if settled at due date. Interest charged on overdue accounts.

DAMAGE IN TRANSIT.—When the price quoted includes delivery, we will repair or replace, free of charge, goods damaged in transit, provided the carriers and ourselves receive written notification of such damage within three days of delivery, but not otherwise.

EXPORT.—We deliver free to any British Port. Packing is charged extra, at cost. Terms of payment on application.

The

EDISWAN HOUSE WIRING SYSTEM.

THE essentials of a good system for surface house wiring are efficiency, economy and safety. While the Ediswan Wiring System possesses these features to a marked degree, it has one other important characteristic, namely, Simplicity.

A highly-skilled workman can wire more points on the Ediswan Wiring System in a given time than by any other system of wiring, while a less experienced man will find the Ediswan system simple and easy to instal, and the material easy to handle. It is often said, with justice, that no system of house-wiring can be so perfect that it is proof against bad workmanship; it would, however, be far more difficult to instal the Ediswan Wiring System badly than to instal it well, and furthermore it is the one system upon which any omissions or mistakes can immediately be detected by mere inspection.

The parts required are few and substantial, no special tools are needed, and the use of each part is obvious from the article itself. This List should be kept handy by every Wiring Contractor to assist him in ordering his requirements, but with the Ediswan Wiring System it will not be found necessary to refer constantly to the instructions in order to know how to use it.

Every detail of the Ediswan Wiring System conforms with the Wiring Rules of the Institution of Electrical Engineers.

The

EDISWAN HOUSE WIRING SYSTEM.

THE CABLE.

THE Cable used for the Ediswan Wiring System has tinned copper conductors, insulated with one layer of pure and two layers of vulcanised rubber to the radial thicknesses specified by the British Engineering Standards Association, the whole being covered with a sheathing of metal alloy. The insulation is of the 600 megohm class, and the cable is tested, after twenty-four hours' immersion in water, both before and after metal covering.

There is sufficient flexibility in the cable to enable comparatively sharp bends to be made in it without breaking the sheathing, but at the same time it is stiff enough to be fixed without sag by means of clips or saddles, or (*preferably*) the Ediswan Cable Fixers described on page 13, placed at the usual distances apart.

The cable is supplied single or twin. In the twin cable the two conductors have differently coloured tapes, and are laid side by side under a metal covering of flat section.

Unless otherwise specified on the order, cable is supplied in 110 yd. lengths on special wooden drums, for which a charge is made of 8s. per drum. The full value of drums will, however, be credited to the customer on their being returned to the Cable Works, Brimsdown, Middlesex, carriage paid, within a period of three months, after which time a rental of 6d. per drum per week will be debited.

Lengths under 110 yds. will be supplied in coils. For lengths under 55 yds. an additional charge of 10% is made for cutting.

The

EDISWAN HOUSE WIRING SYSTEM.

THE CABLE—(*continued*).

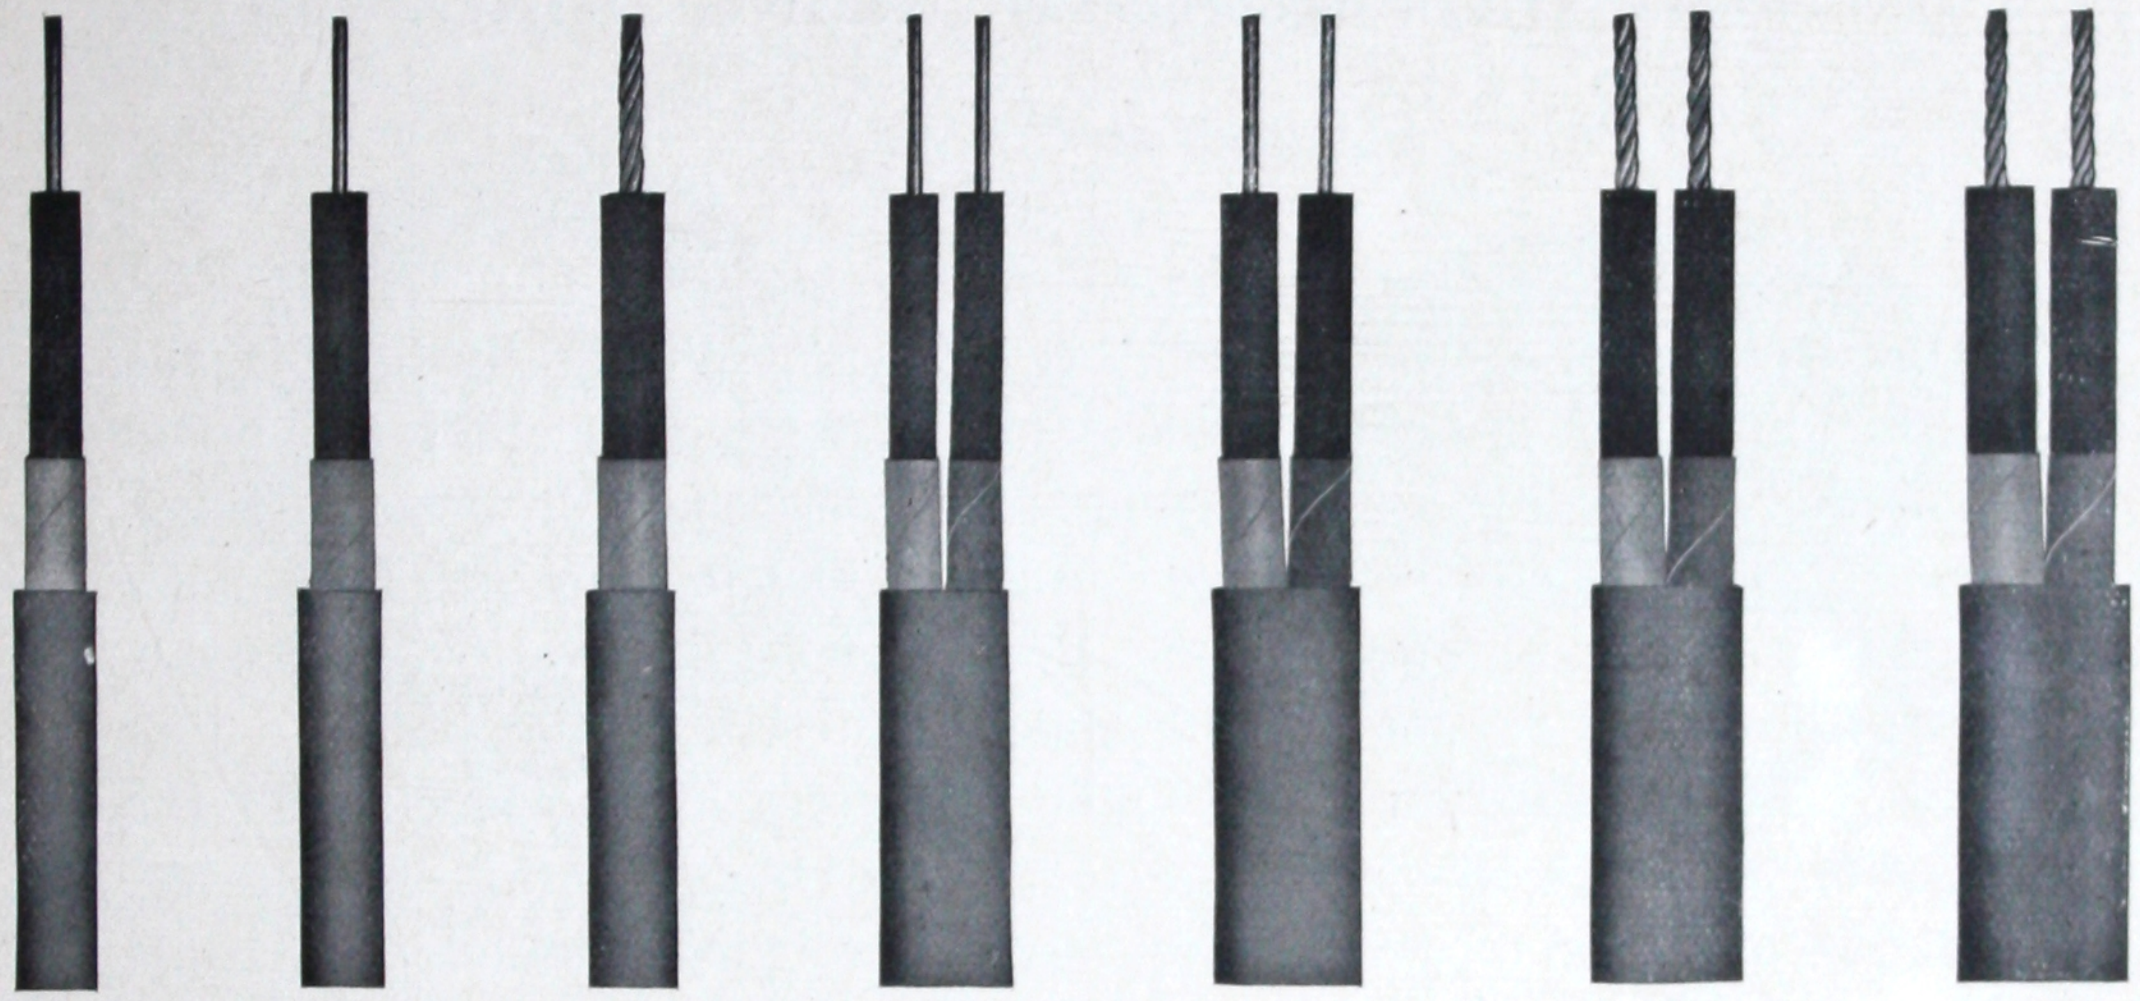

(Approximately actual size.)

Page 5.

REVISED PRICES, October 17th, 1921.

Catalogue No.	Size.	Max. Current. I.E.E. Rules.	Price per 110 yards.			Price per Mile.			Code Word.
		Amp.	£	s.	d.	£	s.	d.	
W.S. 1201	Single ... ·044 in.	6·1	2	6	6	37	4	0	DELYT
W.S. 1202	,, ... 18 S.W.G.	7·2	2	9	6	39	12	0	DEMAG
W.S. 1203	,, ... 3/22 ,,	7·2	2	13	9	42	18	0	DEMIK
W.S. 1211	TWIN ~~Twin~~ ... ·044 in.	6·1	3	16	0	60	15	0	DEMON
W.S. 1212	,, ... 18 S.W.G.	7·2	4	6	0	68	14	0	DEMUD
W.S. 1213	,, ... 3/22 ,,	7·2	4	15	3	76	1	0	DEMYT
W.S. 1214	,, ... 3/20 ,,	12·0	5	14	9	91	16	0	DENAT
W.S. 1223	3-Core ... 3/22 ,, (In 55-yd. Drums.)	7·2	6	15	0	108	0	0	DEOUC

Vord.
rt
ag
ik
on
ud
yf
at

The

EDISWAN HOUSE WIRING SYSTEM.

THE CABLE.

THE Cable used for the Ediswan Wiring System has tinned copper conductors, insulated with one layer of pure and two layers of vulcanised rubber to the radial thicknesses specified by the British Engineering Standards Association, the whole being covered with a sheathing of metal alloy. The insulation is of the 600 megohm class, and the cable is tested, after twenty-four hours' immersion in water, both before and after metal covering.

There is sufficient flexibility in the cable to enable comparatively sharp bends to be made in it without breaking the sheathing, but at the same time it is stiff enough to be fixed without sag by means of clips or saddles, or (*preferably*) the Ediswan Cable Fixers described on page 13, placed at the usual distances apart.

The cable is supplied single or twin. In the twin cable the two conductors have differently coloured tapes, and are laid side by side under a metal covering

Unless otherwise specifie

110 yd. lengths on special v

made of 8s. per drum. Th

be credited to the customer

Works, Brimsdown, Middlese

three months, after which tin

will be debited.

Lengths under 110 yds.

under 55 yds. an additional

The

EDISWAN HOUSE WIRING SYSTEM.

THE CABLE—(*continued*).

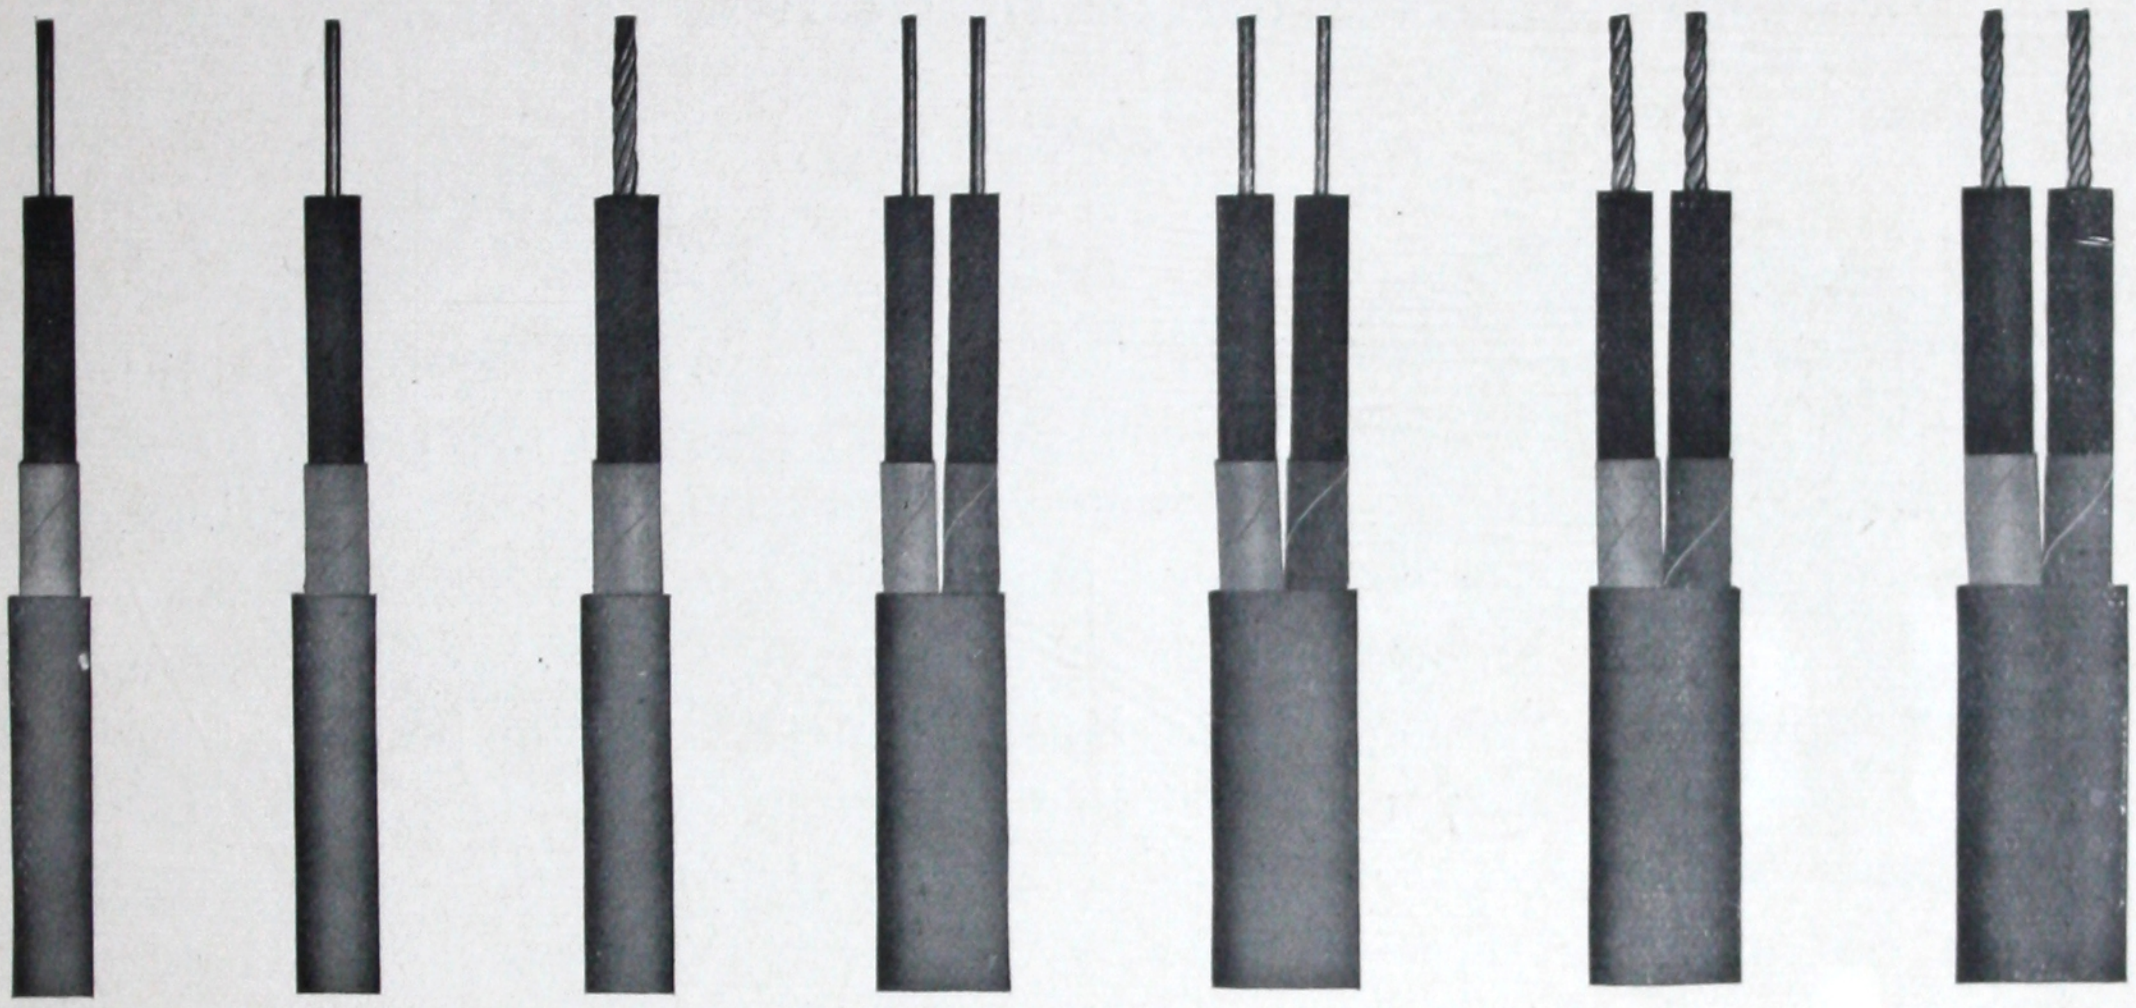

W.S. 1201. **W.S. 1202.** **W.S. 1203.** **W.S. 1211.** **W.S. 1212.** **W.S. 1213.** **W.S. 1214.**

(Approximately actual size.)

Cat. No.	Size.	Maximum Current I.E.E. Rules.	Price per 110 yards.	Price per Mile.	Code Word.
		Amp.	£ s. d.	£ s. d.	
WS. 1201	Single .044″	6.1	2 6 6	37 4 0	Delyt
WS. 1202	,, 18 S.W.G.	7.2	2 11 3	41 0 0	Demag
WS. 1203	,, 3/22 ,,	67.2	2 15 6	44 8 0	Demik
WS. 1211	Twin .044″	6.1	4 8 3	70 12 0	Demon
WS. 1212	,, 18 S.W.G.	7.2	4 12 9	74 4 0	Demud
WS. 1213	,, 3/22 ,,	7.2	5 5 3	84 4 0	Demyf
WS. 1214	,, 3/20 ,,	12.0	6 6 9	101 8 0	Denat

The

EDISWAN HOUSE WIRING SYSTEM.

THE UNIVERSAL BONDING RING.

(*Patent applied for.*)

THE characteristic feature of the Ediswan Wiring System is the bonding ring, for the purpose of connecting together the metal sheathing of the cable at all ceiling roses, switches, or other fittings. It consists of a ring of soft tinned brass in which there are four slots, the sides of which are formed so as to allow the metal-covered cable to pass through. The outer and inner diameters of the bonding ring are the same as the outer and inner diameters of the block, and the blocks are supplied with grooves to fit the bonding ring and cable. When the block is screwed down in the ordinary manner, the cable is gripped on both sides by the bonding ring, and perfect electrical contact is made. No small screws and nuts are required: the necessary bonding is obtained simply by screwing down the wood block by means of the usual wood screw through its centre. It is always possible when inspecting the completed work to see whether the bonding ring has been properly inserted, as the edge and the turned-up portion are visible at the sides of the block.

For back-entry, instead of inserting the cable itself through the slit in the ring, a wing of lead should be turned back from the cable and inserted in the slit in the ring. A plain block is then used, and, when screwed home, presses the lead and ring tight together. If there are both side and back-entry cables to the same block, a block with the requisite number of grooves for the side-entry cables only is used, and the spare ways in the Bonding Ring are employed for gripping the lead of the back-entry cables.

The

EDISWAN HOUSE WIRING SYSTEM.

THE UNIVERSAL BONDING RING—(*continued*).



W.S. 1001.
Universal Bonding Ring.



Bonding Ring and Block.

The bonding rings are suitable for any of the cables listed on page 5. Three of the four slots are of equal width, and the fourth is slightly wider. The smaller slots will take one twin or two single-cables of any of the sizes listed on page 5. The larger slot is intended for a twin cable of any of these sizes with a single wire in addition (for looping-in connections) or for three single cables.

The bonding ring is "universal," and any ways not utilised are automatically pressed flat when the block is screwed home.

CAT. NO.	DESCRIPTION.	PRICES PER DOZ.	CODE WORD.
WS. 1001	Universal Bonding Ring	4/6	Dauov

Packed in boxes containing 36 bonding rings.

A

The

EDISWAN HOUSE WIRING SYSTEM.

WOOD BLOCKS.

(*Patent applied for.*)



W.S. 1002.



W.S. 1003.



W.S. 1004.



W.S. 1005.



W.S. 1006.

These blocks are supplied grooved to take the cable, and in two finishes: Imitation Walnut and White Enamel. They are 3½″ diameter—the standard for the usual patterns of switches and ceiling roses—the internal diameter is 2⅜″, and the thickness 1″. As the Ediswan bonding ring does not occupy any space in the interior of the block, there is ample room for cable slack: the block grips the cable so tightly that it cannot pull back after the block is fixed.

The 4-way block can be considered "universal," as all the ways need not be occupied, and many wiring firms may prefer to stock this size only. It is grooved to take one twin, or two single cables, of any of the sizes listed on page 5.

The grooves in the 2-way and 3-way blocks are of the same size, and the single-way looping block will take three single cables, or a twin and a single cable side by side.

The

EDISWAN HOUSE WIRING SYSTEM.

WOOD BLOCKS—(*continued*).

If, for any special work, larger cable or more cables per way are required, the groove may be eased by a couple of strokes of a half-round file, but it must not be forgotten that a tight fit is essential to good bonding.

BLOCKS.	Imitation Walnut.			White Enamel.		
	Cat. No.	Price per doz.	Code Word.	Cat. No.	Price per doz.	Code Word.
		s. d.			s. d.	
4-way (Universal)	WS. 1002	**4 3**	Dehaw	WS. 1042	**4 7½**	Deiek
2-way (Straight-through)	WS. 1003	**4 0**	Dehey	WS. 1043	**4 4½**	Deilb
2-way (Right Angle)	WS. 1004	**4 1½**	Dehod	WS. 1044	**4 6**	Deiop
1-way (Looping)	WS. 1005	**4 0**	Dehut	WS. 1045	**4 4½**	Deits
3-way	WS. 1006	**4 3**	Dehyv	WS. 1046	**4 7½**	Deiuf

Supplied in parcels of one dozen.

SAFETY BUSHES.

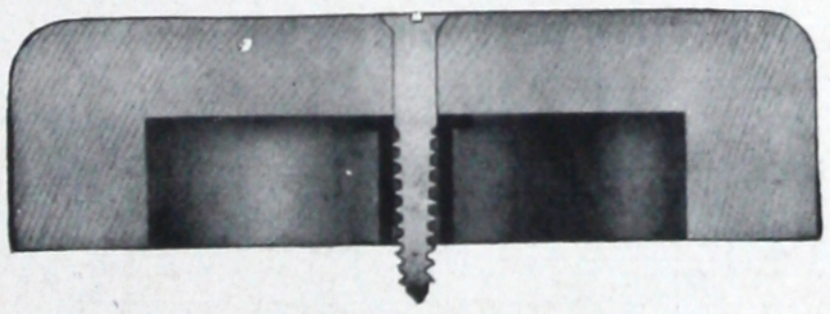

There is more free space within the block of the Ediswan Wiring System than with other systems employing different bonding clamps or rings, and this encourages the wireman to leave plenty of slack behind the block. To avoid any risk of the centre screw damaging the cable, we supply insulating safety bushes as illustrated. Their use is not in any way necessary, but they introduce an additional safety precaution at practically a nominal cost.

CAT. NO.	PRICE PER GROSS.	CODE WORD.
WS. 1050	**7/6**	Delob

Supplied only in ¼-gross boxes.

The

EDISWAN HOUSE WIRING SYSTEM.

JUNCTION BOXES.

(*Patent applied for.*)

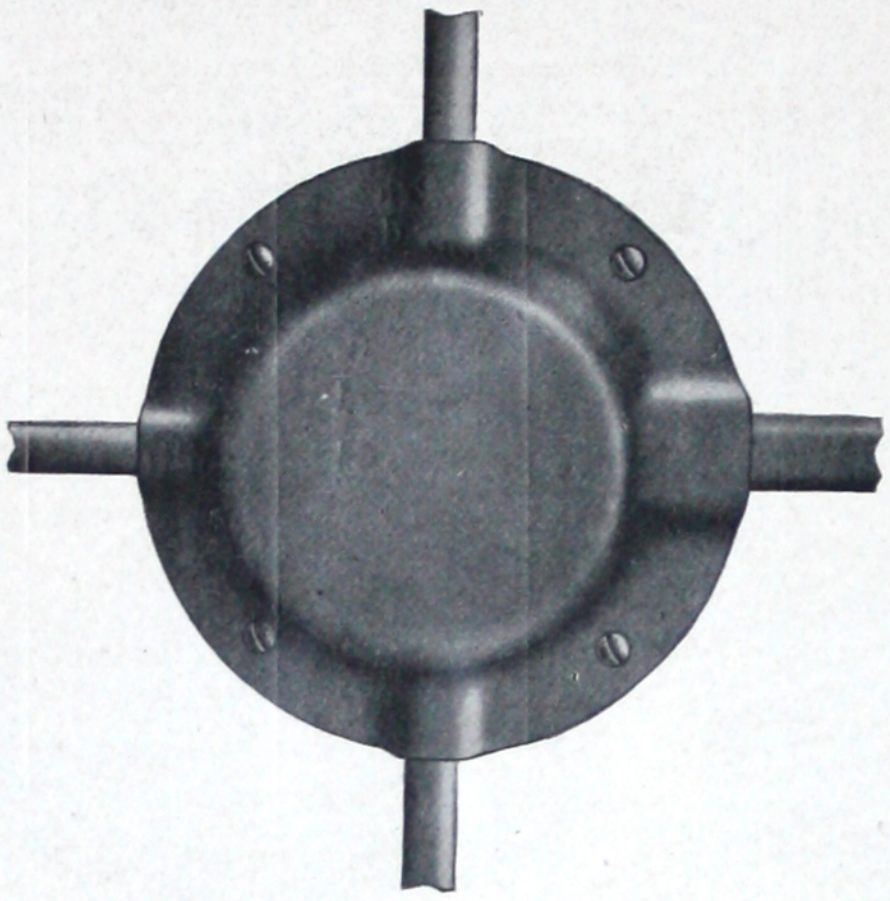

W.S. 1007.
Junction Box with Twin Cables.

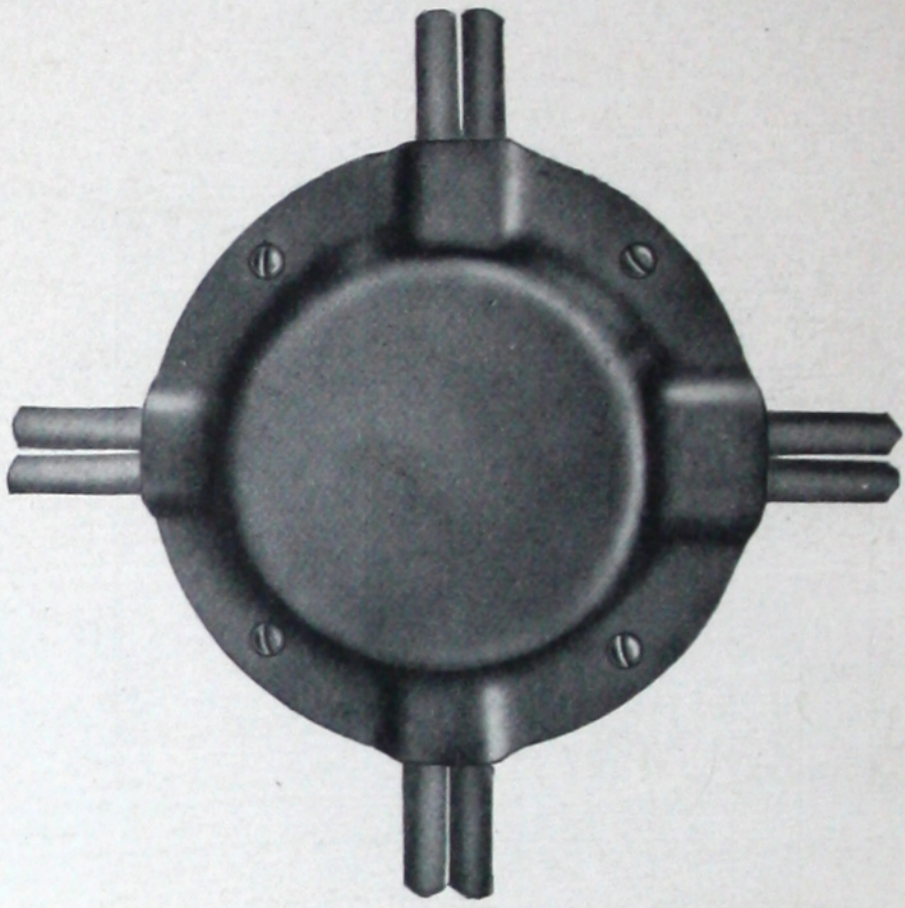

W.S. 1007.
Junction Box with Single Cables.

THE junction box for the Ediswan Wiring System is made in the form of a universal 4-way box. Three of the ways are for two single, or one twin, cable up to 3/22 S.W.G., and the fourth way is slightly larger to take a 3/20 twin cable, but will nevertheless clamp effectively twin or two single cables of smaller size. The box is neat and symmetrical in appearance, and any of the four ways not required may be left spare.

It consists of a heavy iron backplate, a bonding ring, a porcelain connector, and a substantial stamped mild steel cover, painted grey. In fitting, the backplate is screwed to the wall by means of a screw through the centre, the cables are then passed through the bonding ring and connected as desired by means of a porcelain connector, having the requisite number of ways, and the cover is screwed on by four round-headed iron screws provided with the box.

The

EDISWAN HOUSE WIRING SYSTEM.

JUNCTION BOXES—*(continued)*.

As in some cases it may be more convenient to use the backplates and bonding rings separately behind our standard wood blocks (page 8), and in other cases the backplate may be dispensed with and the cover screwed direct to the wall, we supply backplates and covers separately, if desired. The porcelain connectors are listed separately to enable customers to order one-way, two-way or three-way as desired.

CAT. NO.	DESCRIPTION.	PER DOZEN.	CODE WORD.
		s. d.	
WS. 1007	Universal Junction Box complete with back plate, bonding ring and cover, but without porcelain connector	23 3	Dejav
WS. 1008	Cover only, for Universal Junction Box	10 3	Dejoc
WS. 1009	Back plate and screws for ditto	9 0	Dejus

Backplates with centre hole only, without screws—prices on application.

PORCELAIN CONNECTORS.

A. 5631.

A. 5632.


A.5633.

Page 11 REVISED PRICES, October 17th, 1921.

Catalogue No.	DESCRIPTION.	Price per doz.
		s. d.
A 5631 ...	1-way Porcelain Connector	2 3
A 5632 ...	2-way Porcelain Connector	3 9
A 5633 ...	3-way Porcelain Connector	4 6

Ediswan List WW 232

CODE WORD.
Denew
Denup
Deoaf

The

EDISWAN HOUSE WIRING SYSTEM.

BONDING STRIPS
FOR USE AT DISTRIBUTION BOARDS.



W.S. 1010.
2-way Bonding Strip.



W.S. 1011.
3-way Bonding Strip.



W.S. 1012.
6-way Bonding Strip.

The cables are clamped between an iron backplate and a thin tinned brass strip, which ensures perfect contact. The backplates are thick, and there is no risk of the thread of the screw stripping when screwed home. The earthing wire should be inserted between the brass strip and one of the cables before screwing up, or (preferably) soldered to the brass strip.

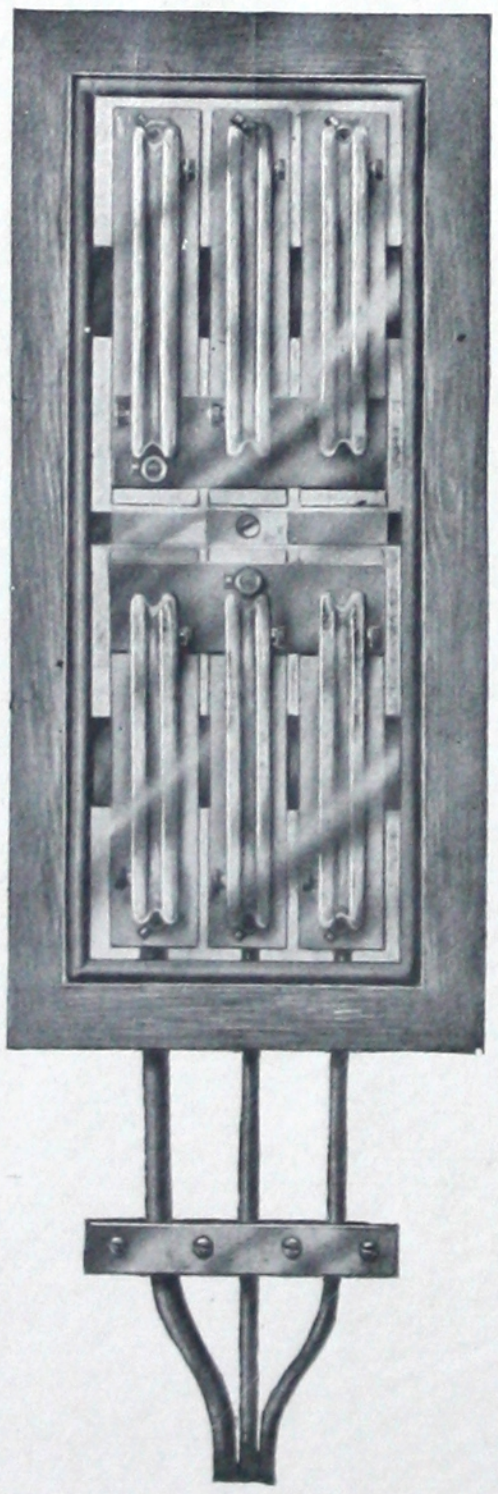

The bonding strips are made 2-way, 3-way and 6-way, each way taking two single, or one twin-cable, of any of the sizes listed on page 5.

If a larger cable has to be bonded up, one screw can be left out and two ways used as one.

CAT. NO.	DESCRIPTION.	PRICE PER DOZ.		CODE WORD.
		s.	d.	
WS. 1010	2-way Bonding Strip	**3**	**9**	Dekak
WS. 1011	3-way ,,	**5**	**3**	Dekil
WS. 1012	6-way ,,	**8**	**3**	Dekyg

The

EDISWAN HOUSE WIRING SYSTEM.

CABLE FIXERS.

(*Patent applied for.*)



W.S. 1030.
Strap and Cap of Ediswan Fixer.



Cable with Ediswan Fixer.

LEAD is admittedly the best material for fixing cable to the walls of buildings. As it is softer than the sheathing of the cable, the cable itself cannot be damaged, and there is also no risk of corrosion. Just because of the softness of lead, however, it has, in the past, been found troublesome to use it for this purpose, and various forms of tinned brass or iron clips have been employed.

The Ediswan Cable Fixer gives the ideal support: the cable is held by a lead strap, but the mechanical weakness usually associated with lead saddles is non-existent. A lead strap is passed round the cable, a bronzed cap fitted over the ends, and the whole nailed or screwed to the wall or ceiling. The cable is securely held without any possibility of the head of the nail or screw being pressed against it; there are no projecting edges of metal; and the minimum time is occupied in fixing.

For vertical runs and on ceilings, the straps should be used with the heads on alternate sides of the cable to secure the firmest fixing, or the strap may be used as a saddle with a cap at each end.

The standard lead straps will take two single cables or one twin. Boxes of cable fixers contain 144 caps, 100 lead straps and 10 ft. of lead strip, so that a longer piece of lead strip may be cut off and used in place of the standard strap for more than two conductors.

CAT. NO.	DESCRIPTION.	PRICE.	CODE WORD.
WS. 1030	Boxes of Cable Fixers, as above	18s. per box	Delew

The

EDISWAN HOUSE WIRING SYSTEM.

WIRING DIAGRAMS.

On the opposite page are typical diagrams, showing suitable connections to meet most of the cases that arise in ordinary wiring work. The method chosen will, of course, depend on the lay-out of the particular job.

Diagram No. 1, which represents the ordinary looping-in connections employed on conduit work, is not necessarily the most economical in material and labour in the case of surface wiring with metal-covered cable.

Diagram 2, with occasional slight modifications, will be found the most economical to employ in a large number of buildings, and also simplifies the subsequent wiring of additional points.

Diagram 3 is a particularly convenient arrangement if the switch is near the lamp.

Generally it will be found that Diagram 2 will work out the simpler when the feed and loop to the next point are nearer to the switch, and Diagram 3 when they are nearer to the ceiling rose.

If, however, the wires are run under the floors to ceiling rose points, it will mostly be found convenient to follow Diagram 2, placing the junction boxes under the floor immediately above the ceiling roses.

Diagram 4 gives the connection for controlling a lamp from two switches in different positions as for staircases, etc. The 2-way switches are shown diagramatically with the "common" terminal at the top right hand.

The

EDISWAN HOUSE WIRING SYSTEM.

WIRING DIAGRAMS.

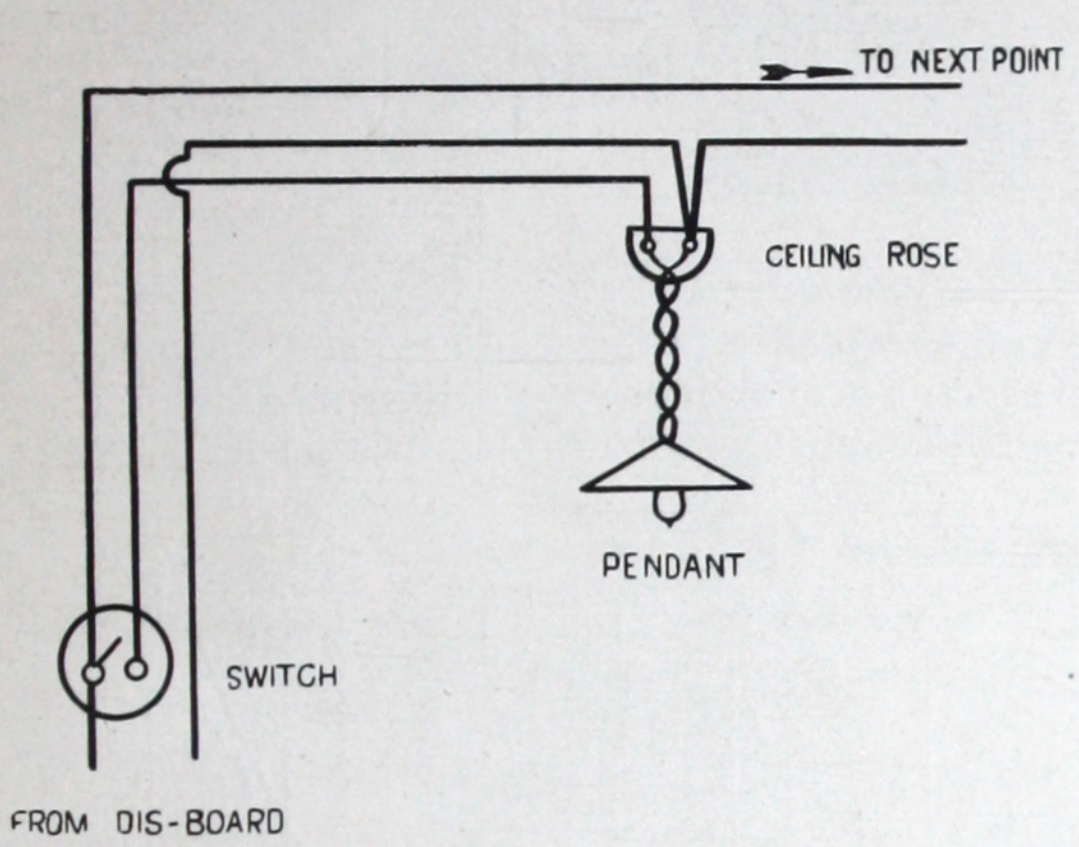

Diagram 1. Ordinary looping connections with single cable, or twin and single cable, without junction boxes. (Requires bonding ring at all switches and ceiling roses except the last on circuit).

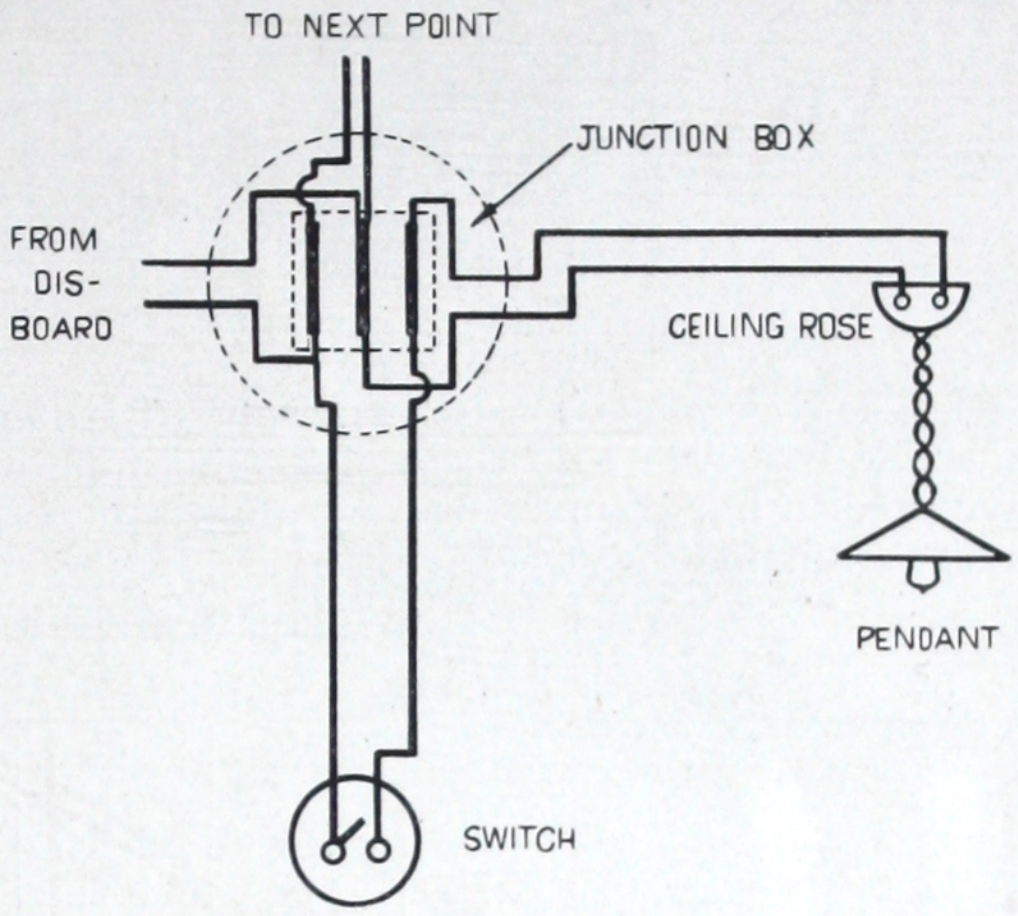

Diagram 2. Looping-in connections with twin cable only, using junction boxes. (Requires junction box for each switch connection, but no bonding rings at switch or ceiling rose blocks, unless more than one point is on same switch).

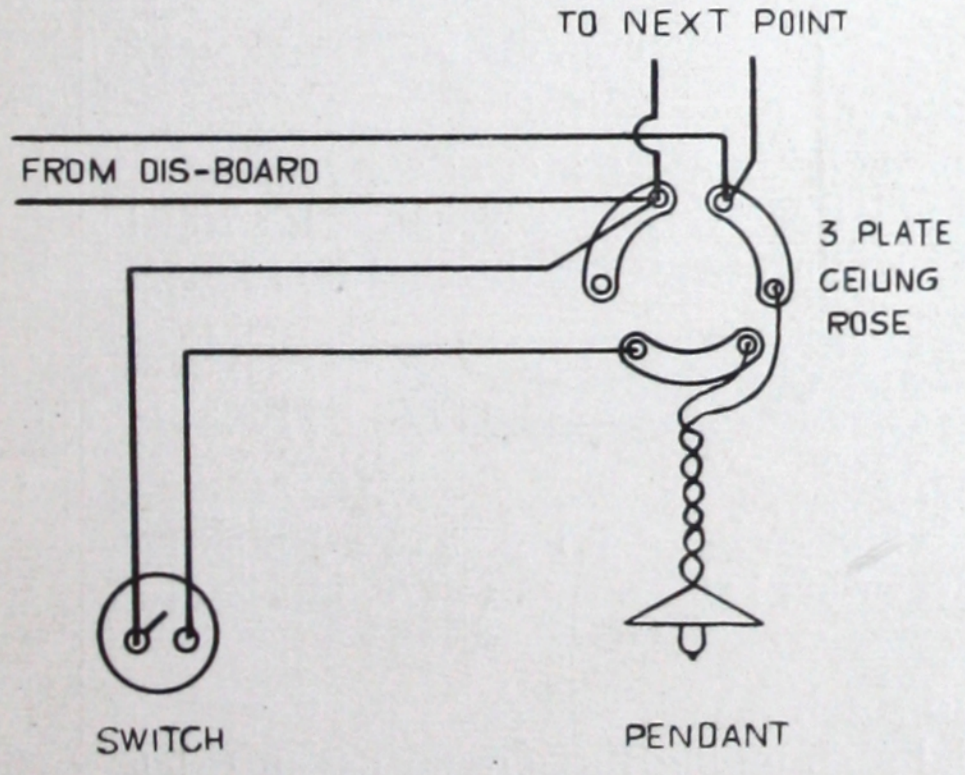

Diagram 3. Looping connections using twin cable only, and 3-plate ceiling rose. (Requires bonding ring at each ceiling rose, but not at switch.)

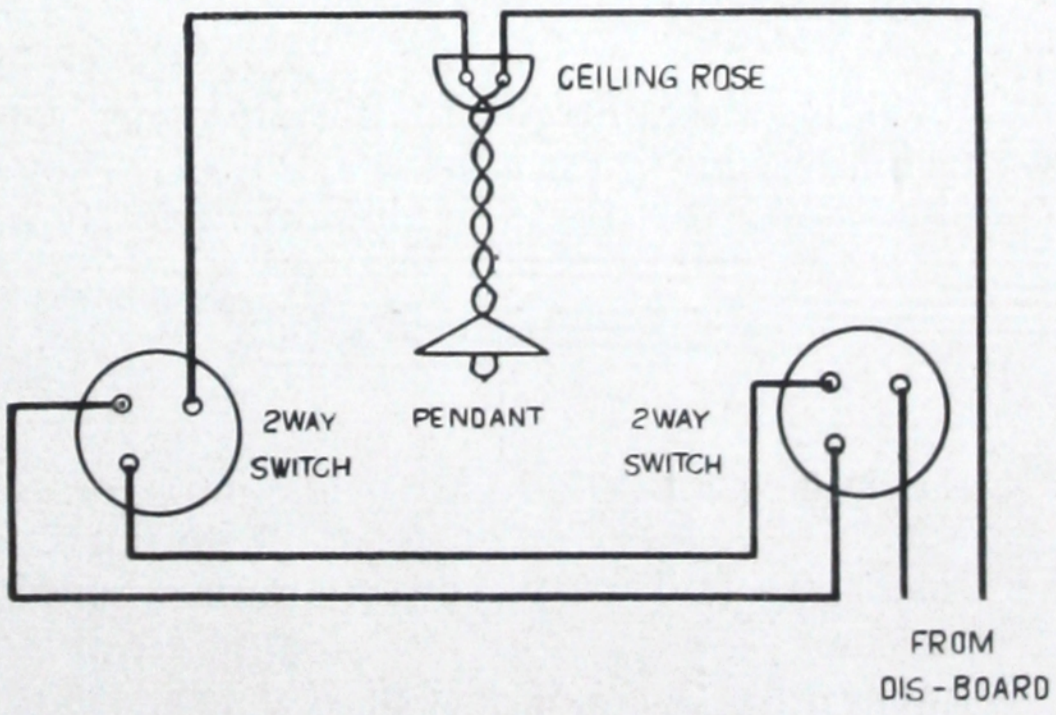

Diagram 4. Two-way switches for controlling a lamp from two points, using single, or single and twin cable. (Requires bonding rings at all points.)

The

EDISWAN HOUSE WIRING SYSTEM.

RAWLPLUGS.

Regd. 345293/12. Patent No. 22680/11.

For Fixing Screws in Plaster, Brick, Marble, Slate, Stone, Cement, Concrete, Metal, Etc.



Section showing "Rawlplug" in position ready for screw.

Actual Size of No. 8 Rawlplug.



Screw entering, showing expansion of Rawlplug against side of hole.

The Rawlplugs consist of a tube of stiffened fibres which automatically expand when a screw is driven into them, thus obtaining a perfectly firm fixing. No skilled handling required to fix. Simply drill or jump a very small hole, push the Rawlplug into position and turn home the screw.

Rawlplugs (only) in Boxes of 100.

Size of Rawlplug.	Will take following sizes of screws.	LENGTH OF RAWLPLUG.						Assorted Lengths.
		½″	⅝″	¾″	1″	1½″	2″	
3	No. 3, 2 and 1	**1/4**	**1/5**	**1/6**	**1/8**	—	—	**1/7**
6	,, 6, 5 ,, 4	**1/6**	**1/7**	**1/9**	**2/-**	—	—	**1/9**
8	,, 8 ,, 7	**1/9**	**1/11**	**2/1**	**2/5**	**3/-**	**3/6**	**2/6**
10	,, 10 ,, 9	**2/-**	**2/2**	**2/4**	**2/9**	**3/5**	**4/1**	**2/10**
12	,, 12 ,, 11	—	—	**2/9**	**3/2**	**4/-**	**4/9**	**3/6**
14	,, 14 ,, 13	—	—	**3/3**	**3/9**	**4/9**	**5/8**	**4/6**

When ordering state the size and length of Rawlplug required.

Rawlplugs require no special screws, ordinary wood screws of the size corresponding to size of Rawlplug are all that are needed, *i.e.*, No. 8 Rawlplug will take a No. 8 screw.

Complete Trial Outfit. All sizes of Plugs and Tools, etc. - - - - - - -	**£2**
Sample Outfit. 100 No. 8 Assorted Plugs, Tool Holder, 2 Bits, Screws, etc. - -	**5/6**

Rawlplug Tools.

Rawlplug steel plugging tools are designed for making holes in any material where it would be inadvisable to use a brace and drill. They make a hole exactly the size required for Rawlplugs and assure that the plug fits perfectly which in turn means an absolutely firm fixing.



Tool Holders.

Rawlplug Tool Holders are made in 6 sizes, each size taking either a Jumping or a Bullet bit. Nos. 3, 6, 8, 10, 12 or 14 (for use with same size of Rawlplug) **25/-** per dozen (holders only). Nos. 3, 6 and 8 are supplied with wood handles.

Bits (Bullet or Jumping).

Bullet Bits are for use in Plaster or any soft material. Jumping Bits are for use in Brick, Concrete or any hard material.

Nos.*	3	6	8	10	12	14
Jumping Bits -	**2/8**	**3/-**	**3/6**	**4/-**	**4/8**	**5/6** per doz.
Bullet Bits -	**2/6**	**2/10**	**3/4**	**3/10**	—	— ,,

* Will fit same size Tool Holders.

The

EDISWAN HOUSE WIRING SYSTEM.

The following are among the accessories suitable for use with the Ediswan Wiring System. Lists and details of other patterns will be furnished on application.

LAMPHOLDERS.

(Bayonet-Standard.)

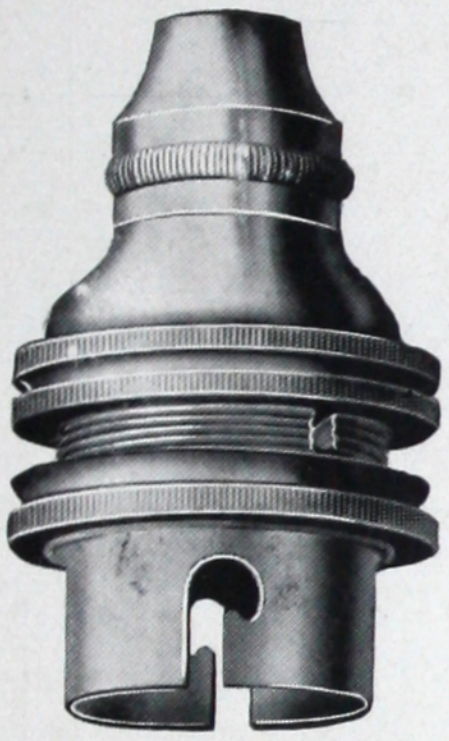

Fig. No. FC 1010.
With Shade Carrier and Cord Grip.
Per doz. - - - **16/6**

Fig. No. FC 1009.
Without Shade Carrier.
Per doz. - **15/–**



Fig. No. FC 1013.
Flanged with Shade Carrier.
Per doz. - - **16/6**

Fig. No. FC 1012.
Without Shade Carrier.
Per doz. - **15/–**

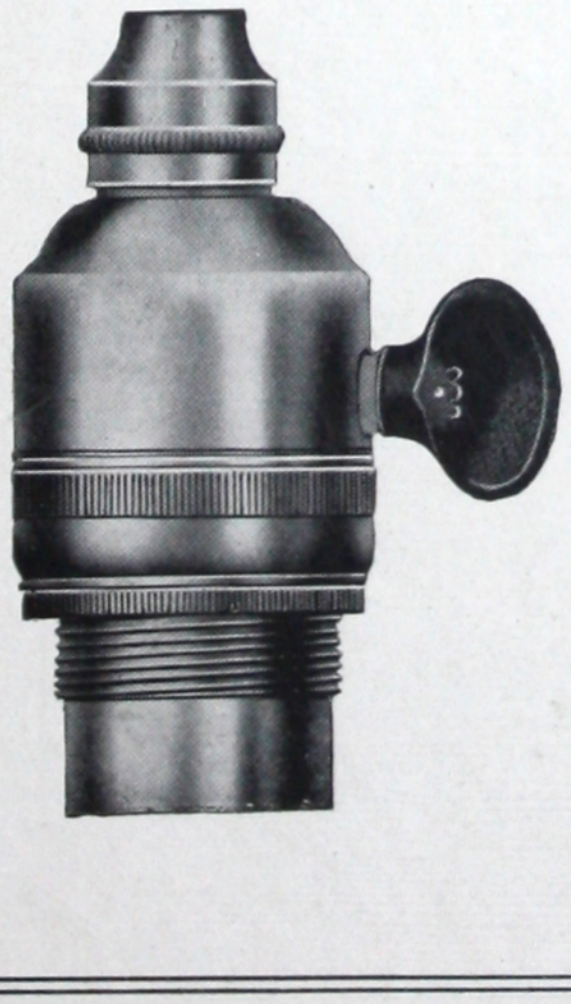

(Keyholder Rotary).
Fig. No. FC 1022.

With Shade Carrier and Cord Grip.
Per doz. - **44/6**

A

The

EDISWAN HOUSE WIRING SYSTEM.

CEILING ROSES.

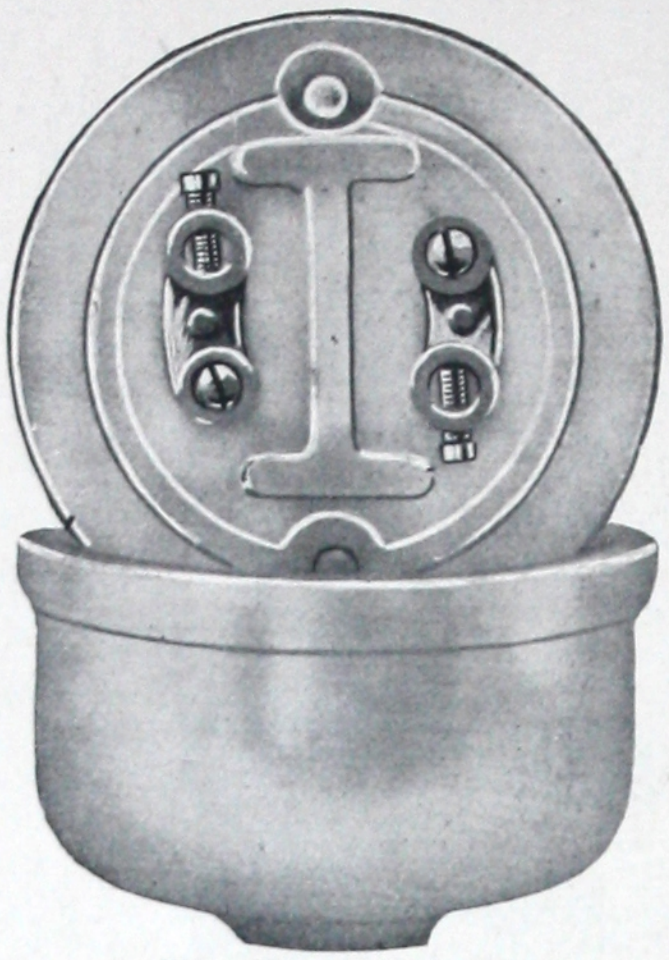

Fig. No. FC 1041.
2-Plate High Voltage Kidney Pattern.
Per doz. - - **15/–**

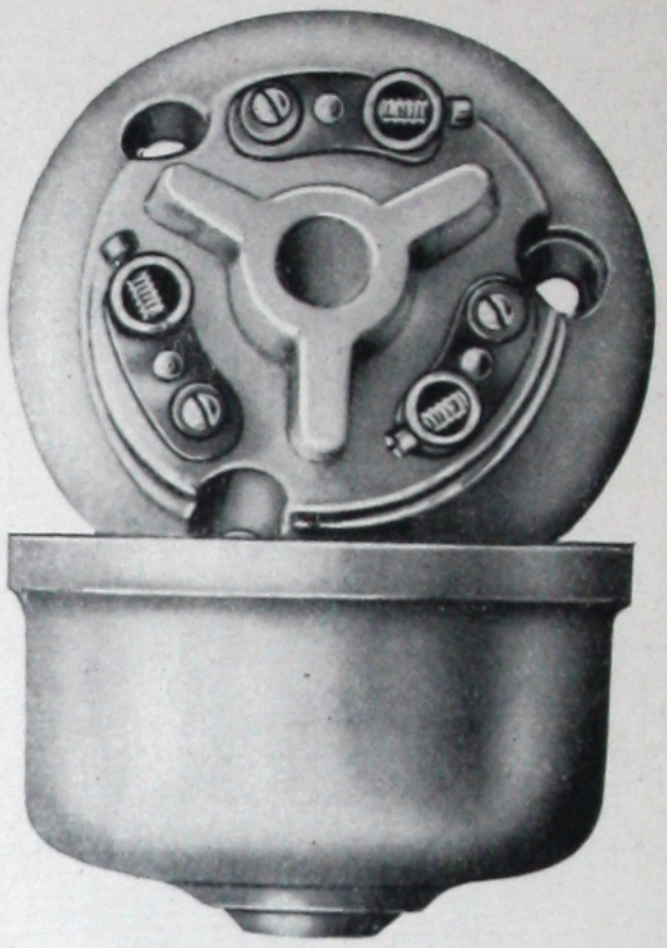

Fig. No. FC 1042.
3-Plate High Voltage Pattern.
Per doz. - - **18/–**

SWITCHES.

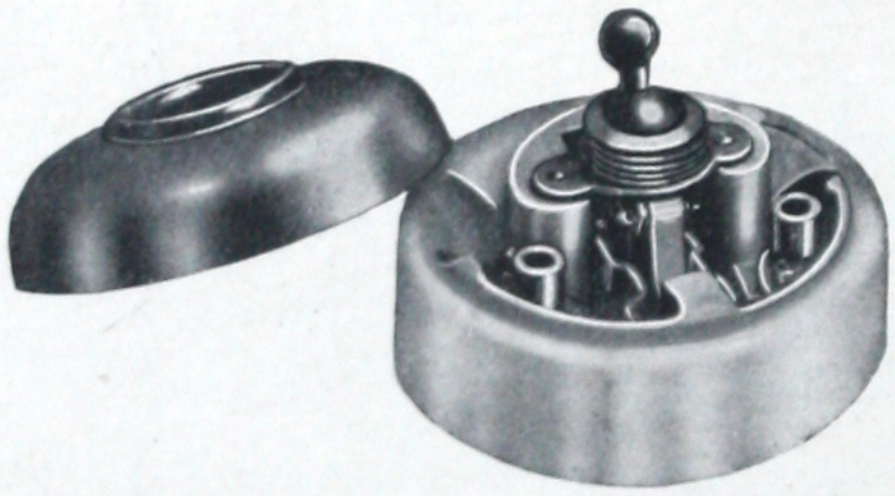

Link Type.
Fig. No. FC 1101.
5 amp., 2¼ in. diameter. Polished Brass Cover.
Each - - **2/3**

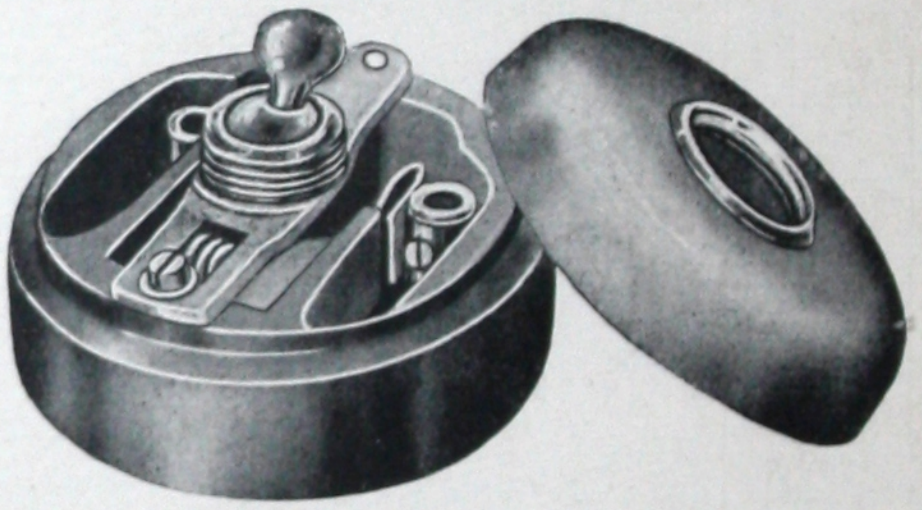

"Phlatta-Wedge" Type.
Fig. No. A0191.
5 amp., 2¼ in. diameter. Polished Brass Cover.
Each - - **2/6**
Fig. No. A0192.
10 amp., 2¾ in. diameter. Polished Brass Cover.
Each - - **4/–**

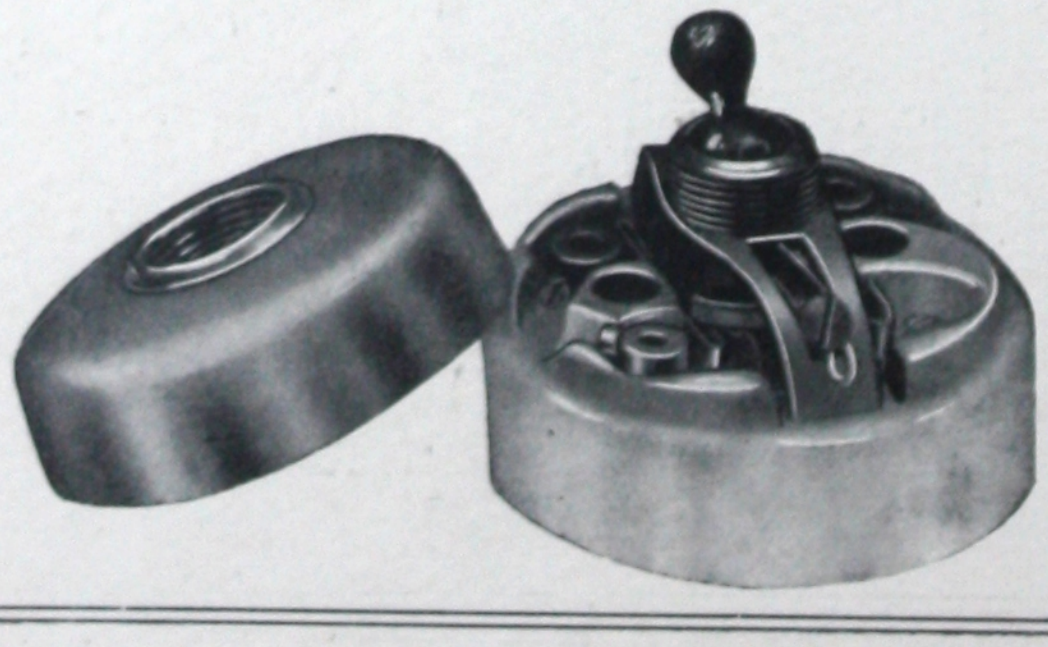

Fig. No. A 0221.
5 amp., 2¼ in. diameter
2-way.
Each - - **4/3**

The

EDISWAN HOUSE WIRING SYSTEM.

SOCKETS AND PLUGS.

5 amp.
2¼ in. diameter

Fig. No. A 944.

All porcelain with
Hardwood Plug.

Each - **2/9**

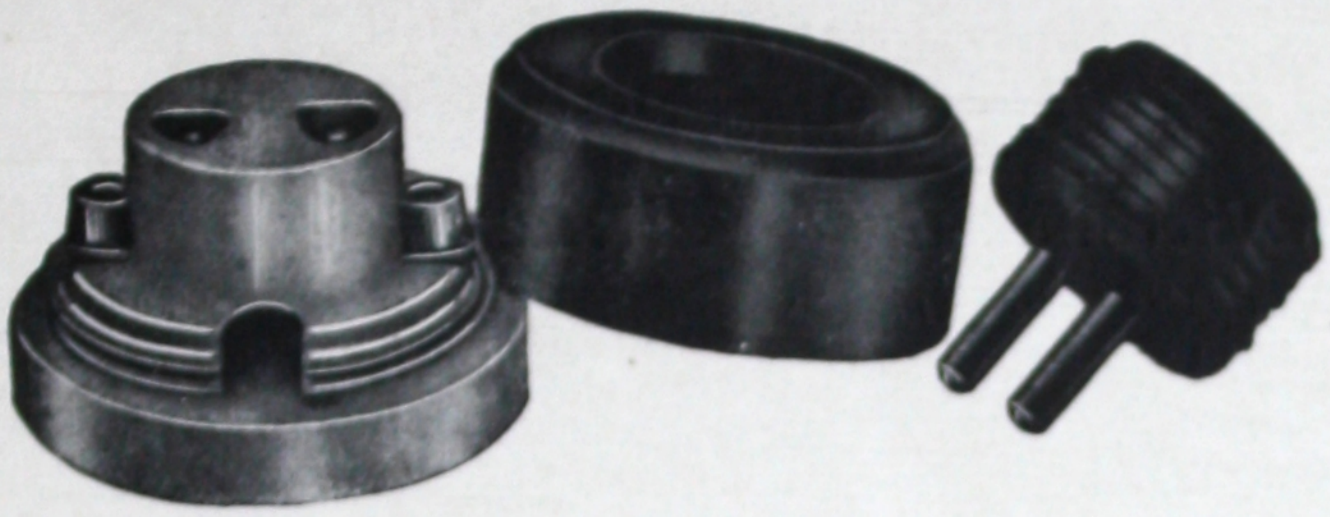

15 amp.
2½ in. diameter.

Fig. No. A 947.

All porcelain with
Hardwood Plug.

Each - **3/6**

CUT-OUTS.

Porcelain.
Round—Single Pole.

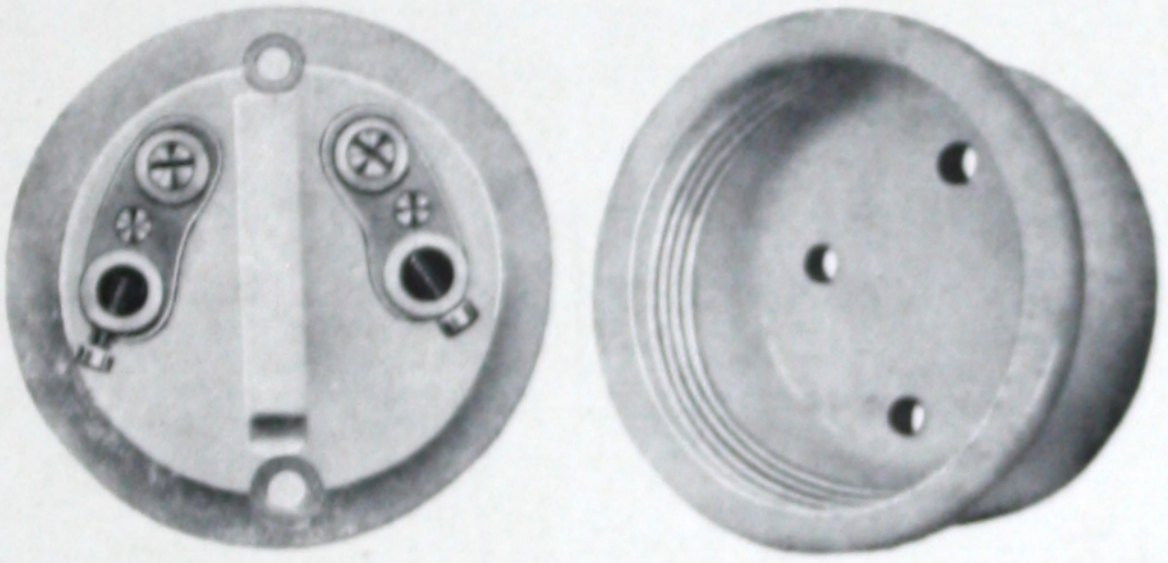

Fig. No. FC 1051.
5 amp.
Cream, per doz. - **14/3**

Fig. No. FC 1052.
10 amp.
Cream, per doz. - **15/6**

FUSE BOARDS.

CLIP BRIDGE TYPE—5 AMPS. PER WAY—DOUBLE POLE.

Specification.

Base made up of unit S.P. slabs of vitreous porcelain, with porcelain dividing fillet. The fuses are of the channel pattern, the fuse wire being in sight. The case is of stained wood, with hook and eye.

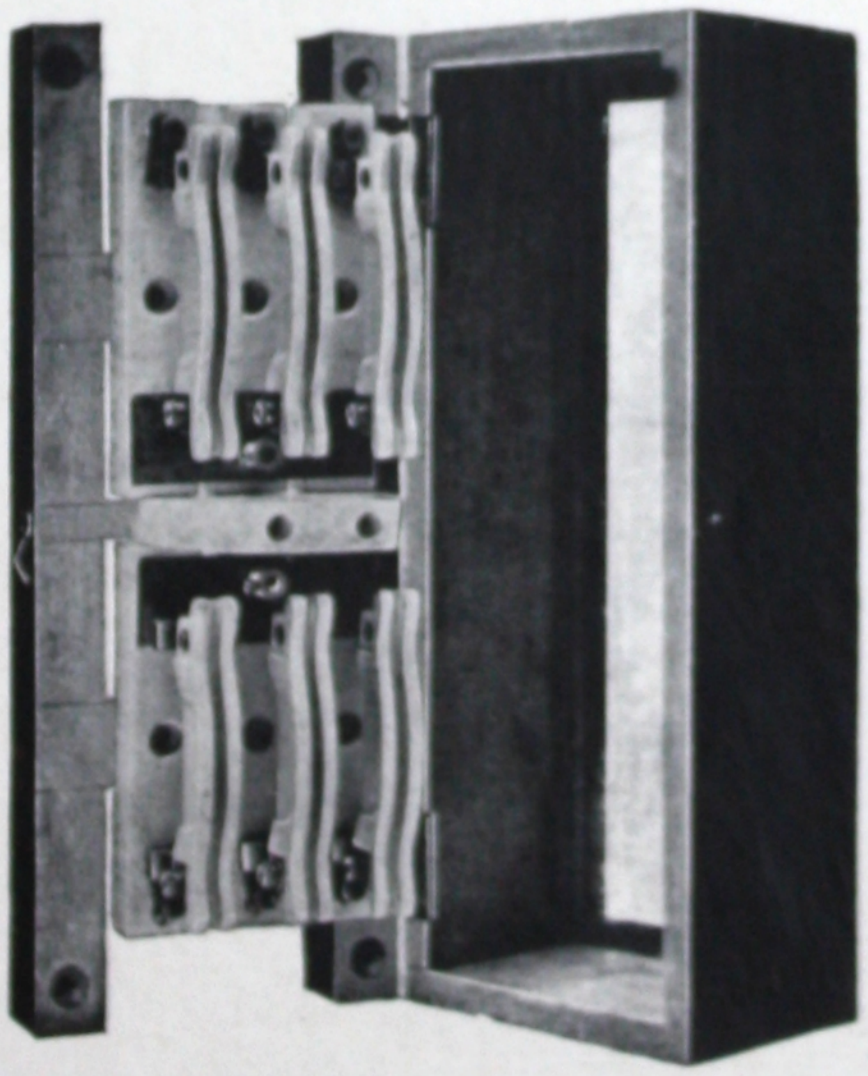

Fig. No. FC 1061.

2-way,	double	pole	- **12/9**
3 „	„	„	- **15/–**
4 „	„	„	- **18/–**
5 „	„	„	- **22/6**
6 „	„	„	- **26/3**

Spare bridges **9/-** per doz.

EDISWAN
EVERYTHING ELECTRICAL

THE EDISON SWAN ELECTRIC CO., LTD.,

PONDERS END, MIDDLESEX.

Telegrams and Cables: "Ediswan, Enfield." Telephone: Enfield 520 (6 Lines).
Code: Western Union, A.B.C. (5th Edition).

LONDON SHOWROOMS:

123/5, Queen Victoria Street, E.C.4.
"Ediswan, London." City 9882/3/4/5.

71, Victoria Street, S.W.1.
"Escotrical, Phone, London." Victoria 6407.

BRANCHES:

ABERDEEN.	38, Bridge Street.	"Ediswan, Aberdeen." 'Phone 545.
BELFAST.	3, Fountain Street.	"Ediswan, Belfast." 'Phone 649.
BIRMINGHAM.	International Exchange. Buildings, Edmund Street.	"Ediswan, Birmingham." 'Phone Central 5742/3.
BRIGHTON.	186, Western Road.	"Ediswan, Brighton." 'Phone 5018.
BRISTOL.	71, Victoria Street.	"Ediswan, Bristol." 'Phone 5760/1.
CARDIFF.	25/27, Charles Street.	"Ediswan, Cardiff." 'Phone 771.
DUBLIN.	187, Gt. Brunswick Street.	"Ediswan, Dublin." 'Phone 618.
DUNDEE.	38, Nethergate.	"Ediswan, Dundee." 'Phone 2545.
EDINBURGH.	46, George Street.	"Ediswan, Edinburgh." 'Phone 8448 Central.
GLASGOW.	153, West George Street.	"Ediswan, Glasgow." 'Phone Central 1609 (2 lines).
HULL.	54, King Edward Street.	"Ediswan, Hull." 'Phone Central 4614/5.
LEEDS.	6, 7 & 8, Albion Place.	"Ediswan, Leeds." 'Phone Central 27200.
LEICESTER.	Royal Arcade, High Street.	"Ediswan, Leicester." 'Phone 2806.
LIVERPOOL.	48, Duke Street. 33, School Lane.	"Ediswan, Liverpool." 'Phone Royal 5052/3.
MANCHESTER.	10, Deansgate. 10, Grosvenor Avenue. Victoria Bridge.	"Ediswan, Manchester." 'Phone City 3494.
MIDDLESBROUGH.	10, Albert Road. 7/8, Albert Street.	"Ediswan, Middlesbrough." 'Phone 1136.
NEWCASTLE.	34, Grainger Street, West.	"Ediswan, Newcastle." 'Phone Central 1655.
NOTTINGHAM.	Beastmarket Hill.	
" "	Great Market Place.	"Ediswan, Nottingham." 'Phone 5610/1.
SHEFFIELD.	17, Castle Street.	"Ediswan, Sheffield." 'Phone 1745 (2 lines).
SOUTHAMPTON.	123, High Street.	"Ediswan, Southampton." 'Phone 1662.
SWANSEA.	20, Wind Street.	"Ediswan, Swansea." 'Phone Docks 224.

MELBOURNE. BRISBANE. SYDNEY.